


## Rectifier Diode, 60A x 2 1200V / 1600V



### FEATURES


- International standard package mini BLOC, ISOTOP compatible
- Isolation voltage 2500V above
- Glass passivated chips
- 2 independent diodes in one package
- Compliant to RoHS
- Designed and for industrial level
- UL approved file E320098




### APPLICATIONS

- Switching mode power supplies
- Inductive heating and melting
- Input rectifier diode
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

### CIRCUIT CONFIGURATION



Parallel  
NST120Dxx



Anti-Parallel  
NST120Dxx-A

### PRODUCT SUMMARY

$I_{F(AV)}$ @ 80°C per diode	60A
$V_{RRM}$	1200 to 1600V
Type	Modules-Diode, High Voltage

### MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNIT
$I_{F(AV)}$	$T_C = 80^\circ\text{C}$	60	A
$I_{F(RMS)}$		94	
$I_{FSM}$	50 HZ	750	
	60 HZ	785	
$I^2t$	50 HZ	2.81	$\text{kA}^2\text{s}$
	60 HZ	2.56	
$I^2\sqrt{t}$		28.1	$\text{kA}^2\sqrt{\text{s}}$
$V_{RRM}$	Range	1200 to 1600	V
$T_J$		-40 to 150	$^\circ\text{C}$
$T_{stg}$			

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ , MAXIMUM AT $T_J = 150^\circ\text{C}$ mA
NST120DXX NST120DXX-A	12	1200	1300	5.0
NST120DXX NST120DXX-A	16	1600	1700	


FORWARD CONDUCTION (Per Diode)					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNIT
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave		60	A
				80	°C
Maximum RMS forward current	$I_{F(RMS)}$	DC at 80°C case temperature		94	A
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10ms	No voltage reapplied	750	A
		t = 8.3ms		100% $V_{RRM}$ reapplied	
		t = 10ms	Sinusoidal half wave, initial $T_J = T_{J(max)}$		
		t = 8.3ms		660	
Maximum $I^2t$ for fusing	$I^2t$	t = 10ms	No voltage reapplied	2.81	kA <sup>2</sup> s
		t = 8.3ms		100% $V_{RRM}$ reapplied	
		t = 10ms	1.98		
		t = 8.3ms	1.80		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reapplied		28.1	kA <sup>2</sup> √s
Threshold voltage	$V_{TO}$	For power-loss calculations only		0.80	V
Forward slope resistance	$r_T$	$T_J = T_{J(max)}$		8.0	mΩ
Maximum forward voltage drop	$V_{FM}$	$I_{FM} = 60A, T_J = 25^\circ C, t_p = 400 \mu s$ square wave		1.25	V

BLOCKING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum peak reverse leakage current	$I_{RRM}$	$T_J = 25^\circ C$		5.0	μA
		$T_J = 150^\circ C$		5.0	mA
Maximum RMS insulation Voltage	$V_{INS}$	50/60 Hz, $I_{INS} \leq 1$ mA		2500 (1 min) 3000 (1 s)	V


THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNIT
Junction and storage temperature range	$T_J, T_{stg}$			-40 to 150	°C
Maximum internal thermal resistance, junction to case per leg	$R_{thJC}$	DC operation		0.65	°C/W
Typical thermal resistance, case to heatsink per module	$R_{thCS}$	Mounting surface flat, smooth and greased		0.1	
Mounting force, ±10% to heatsink, M4 busbar, M4		A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		1.1	Nm
				1.1	
Approximate weight				30	g
				1.06	oz.
Case style		JEDEC		SOT-227	

## Nell High Power Products


**Fig.1 Current ratings characteristics**

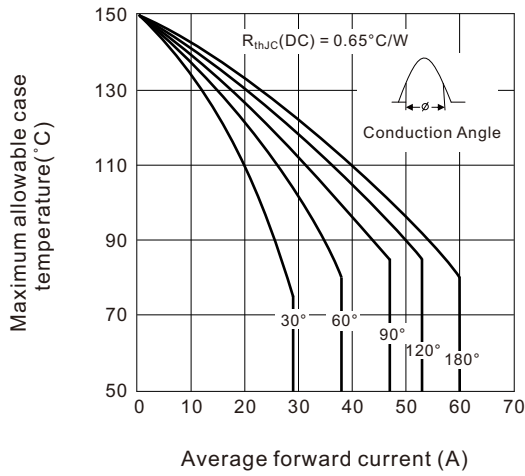


**Fig.2 Current ratings characteristics**

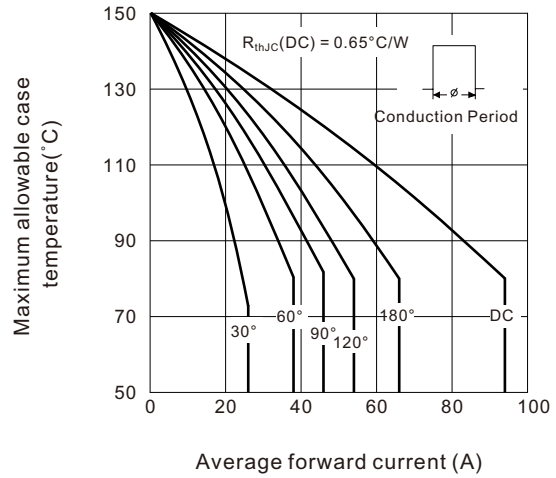


**Fig.3 On-state power loss characteristics**

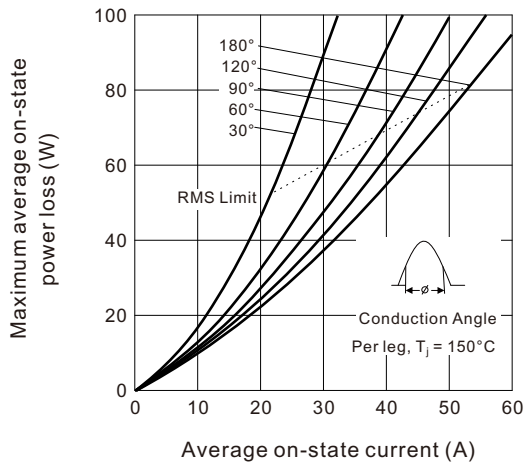


**Fig.4 On-state power loss characteristics**

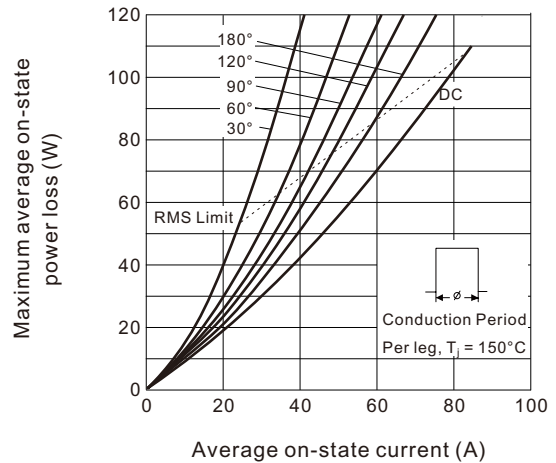


**Fig.5 Maximum non-repetitive surge current**

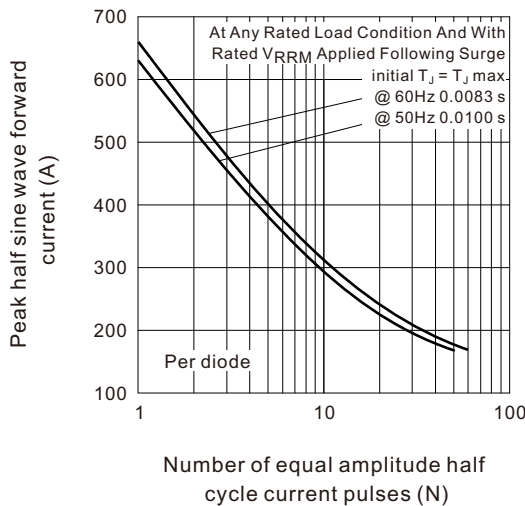


**Fig.6 Maximum non-repetitive surge current**

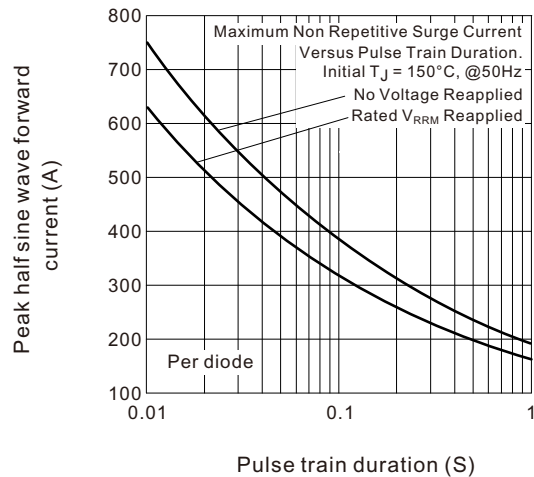


**Fig.7 Forward voltage characteristics**

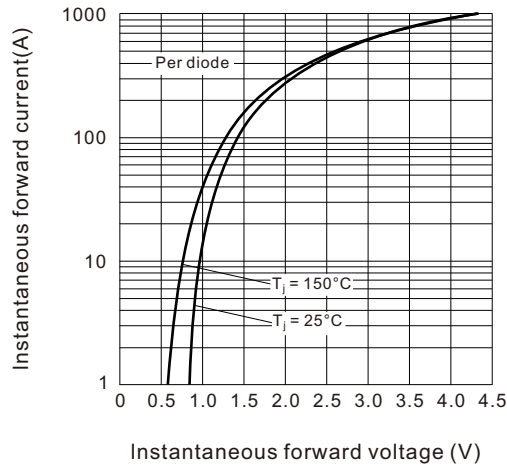

**Fig.8 Thermal Impedance  $Z_{thJC}$  characteristics**

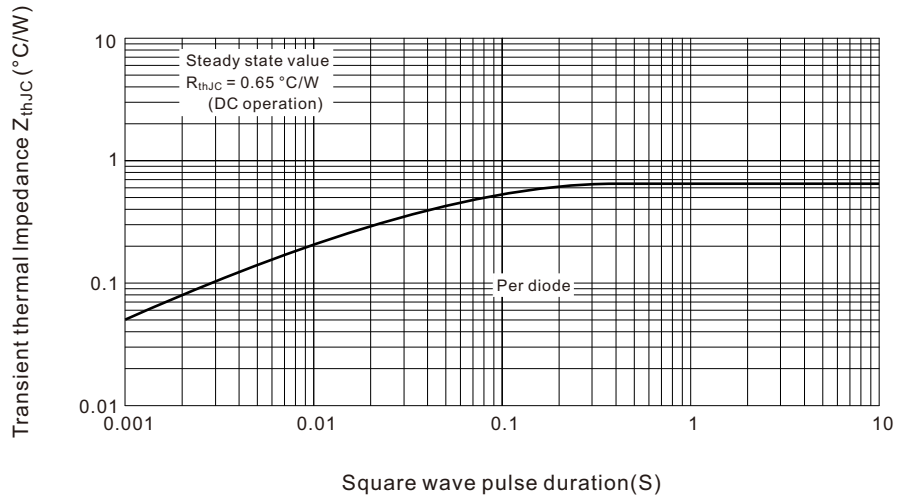

### SOT-227

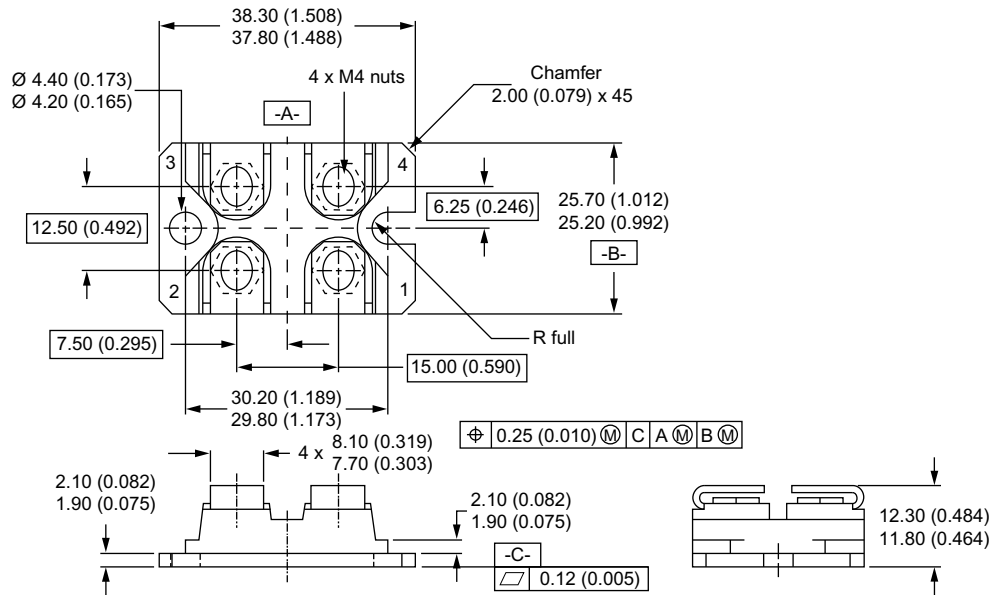

All dimensions in millimeters (inches)

#### Notes

- Dimensioning and tolerancing per ANSI Y14.5M-1982
- Controlling dimension: millimeter

### ORDERING INFORMATION TABLE

Device code	<b>N</b>	<b>ST</b>	<b>120</b>	<b>D</b>	<b>12</b>	<b>-</b>	<b>A</b>
	①	②	③	④	⑤		⑥

- ① - Nell High Power Products
- ② - Package indicator (SOT-227)
- ③ - Current rating (120 = 120A, 60A x 2)
- ④ - D = Standard Diode family
- ⑤ - Voltage rating (12 = 1200 V)
- ⑥ - Circuit type, A for Anti-Parallel type  
Blank for parallel type.